



OR10H560M

HALF CELL LINE



HALF-CELL MODULE

The 144 Half Cut module of the Import Line combines the high production efficiency of the half cell technology with an excellent quality / price ratio.

The half-cell configuration improves the electrical distribution inside the panel to increase the yield of the product. For these reasons, the Half Cell Line is suitable not only for industrial installations but also for residential and commercial installations.

30 YEAR LINEAR POWER WARRANTY
25 YEAR PRODUCT WARRANTY



PERC TECHNOLOGY



MODULE FIRE PERFORMANCE: **CLASS 1**



ANTI-REFLECTIVE GLASS



QBE INSURANCE
Product Liability Insurance QBE

Cells



144 CELLS
MONO gBB / 10BB M10 HALF | PERC

182 x 91 mm / 7.16 x 3.58"

Frame



COMPACT AND STURDY | 30 / 35 mm

ANCHORABLE ALSO ON
THE SHORT SIDE ⁽⁵⁾

HALF CELL LINE

Electrical Characteristics (STC) ⁽¹⁾

	OR10H560M
Nominal Output (P _{max}) ⁽²⁾	560 W
Sorting Tolerance	0/+5 W
Voltage at P _{max} (V _{mp})	40.86 V
Current at P _{max} (I _{mp})	13.7 A
Open Circuit Voltage (V _{oc}) ⁽²⁾	48.29 V
Short Circuit Current (I _{sc}) ⁽²⁾	14.53 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	25 A
Module Efficiency	21.67%
Protection class against electric shock	Class II

Mechanical Characteristics

Solar Cells	144 M10 HALF monocrystalline PERC
Solar Cells Size	182 x 91 mm / 7.16 x 3.58"
Front Cover	3.2 mm / 0.13" thick, low iron tempered glass
Back Cover	TPT (Tedlar-PET-Tedlar)
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Frame finishing	Silver
Backsheet finishing	White
Diodes	3 Bypass diodes serviceable
Junction Box	IP67 rated
Connector	MC4 or compatible connector
Cables Lenght	1300 mm / 51.18"
Cables Section	4.0 mm ² / 0.006 in ²
Dimensions	2279 x 1134 x 30/35 mm / 89.72 x 44.65 x 1.18/1.38"
Weight	27.6 Kg / 60.85 lbs
Max Load (Test Load) - SF	5400 Pa - 15 ⁽⁵⁾

Temperature Characteristics

NMOT ⁽³⁾	45±2 °C
Temperature Coefficient of P _{max}	-0.37 %/°C
Temperature Coefficient of V _{oc}	-0.28 %/°C
Temperature Coefficient of I _{sc}	0.042 %/°C
Operating Temperature	-40 °C ~ +85°C


Packaging ⁽⁴⁾

Pallet dimensions	2310 x 1120 x 1260 mm / 90.94 x 44.09 x 49.61"
Pieces per pallet	31 / 36
Weight	880 kg / 1940.07 lbs (31 panels per pallet) 1018 kg / 2244.30 lbs (36 panels per pallet)


Certifications

Fire Resistance Rating	Class of reaction to fire 1 (UNI 9177)
Product Certificate	IEC 61215-1, IEC 61215-1-1, IEC 61215-2, IEC 61730-1, IEC 61730-2

Dimensions

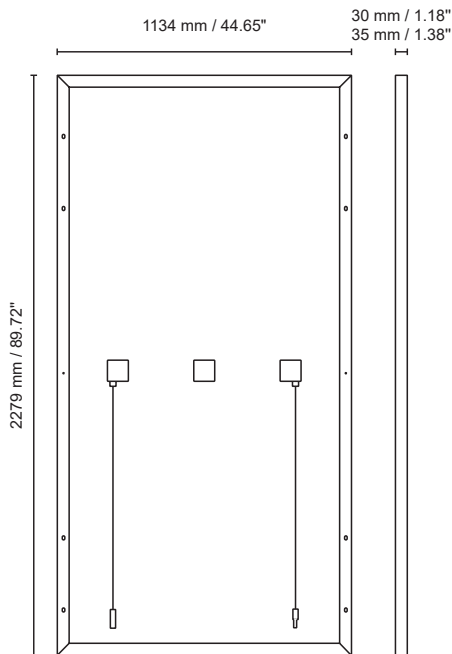

Current/Voltage Characteristics

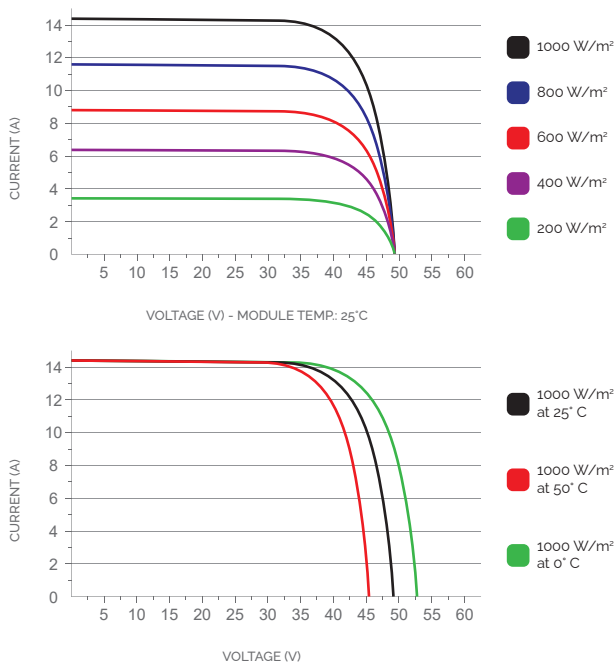

1. STC: (Standard Test Condition) Irradiance 1000W/m²; Module Temperature 25°C; Air Mass 1.5

2. P_{max}, V_{oc}, I_{sc} measurement tolerance: ±3%

3. NMOT: Nominal Module Operating Temperature; Irradiance 800W/m²; Air 20°C; Wind speed 1m/s

4. Pallets can be stacked up to two

5. Consult the installation manual for the relative mounting configurations